

**Round Type LED lamp, Multi-Dice**
**BL-L101XXX3**
**Features:**

- 10mm Round LED Lamps, 3 Dice built-in
- Ultra brightness.
- Choice of various viewing angles.
- Diffused, Transparent and Water clear lens
- IC compatible /Low current capability.
- RoHs Compliance


**RoHs Compliance**
**Electrical-optical characteristics: (Ta=25°C) (Test Condition: IF=60mA)**

Part Number	Chip			Lens Type	Forward Voltage(VF) Unit:V		Luminous Intensity (lv) Unit:mcd		Viewing Angle 2θ1/2 (deg)
	Emitted Color	Material	λ <sub>p</sub> (nm)		Typ	Max	Min.	Typ.	
					BL-L101SRW3	Hi Red	AlGaAs,SH	660	
BL-L101LRW3	Super Red	AlGaAs,DH	660	1.85	2.20	750	1500		
BL-L101URW3	Ultra Red	AlGaAs,DDH	660	1.95	2.20	1800	2000		
BL-L101UEW3	Ultra Orange	AlGaInP	630	2.10	2.50	2400	3500		
BL-L101UYW3	Ultra Yellow	AlGaInP	590	2.10	2.50	1800	3000		
BL-L101UGW3	Ultra Green	AlGaInP	574	2.20	2.50	600	1100		
BL-L101PGW3	Ultra Pure Green	InGaN	525	3.80	4.50	3000	5000		
BL-L101BGW3	Ultra Bluish Green	InGaN	505	3.80	4.50	2400	5000		
BL-L101UBW3	Ultra Blue	InGaN	470	2.70	4.20	2400	4000		

**Absolute maximum ratings (Ta=25°C)**


Parameter	SR	LR	UR	UE	UY	UG	PG	BG	B	UB			Unit
Forward Current I <sub>F</sub>	25	25	25	30	30	30	30	30	30	30			mA
Power Dissipation P <sub>d</sub>	60	60	60	65	65	75	110	110	120	120			mW
Reverse Voltage V <sub>R</sub>	5	5	5	5	5	5	5	5	5	5			V
Peak Forward Current I <sub>PF</sub> (Duty 1/10 @1KHZ)	150	150	150	150	150	150	150	100	100	100			mA
Operation Temperature T <sub>OPR</sub>	-40 to +80											°C	
Storage Temperature T <sub>STG</sub>	-40 to +85											°C	
Lead Soldering Temperature T <sub>SOI</sub>	Max.260±5°C for 3 sec Max. (1.6mm from the base of the epoxy bulb)											°C	

Round Type LED lamp, Multi-Dice

BL-L101XXX3

■ Package configuration & Internal circuit diagram

BL-L101 Series

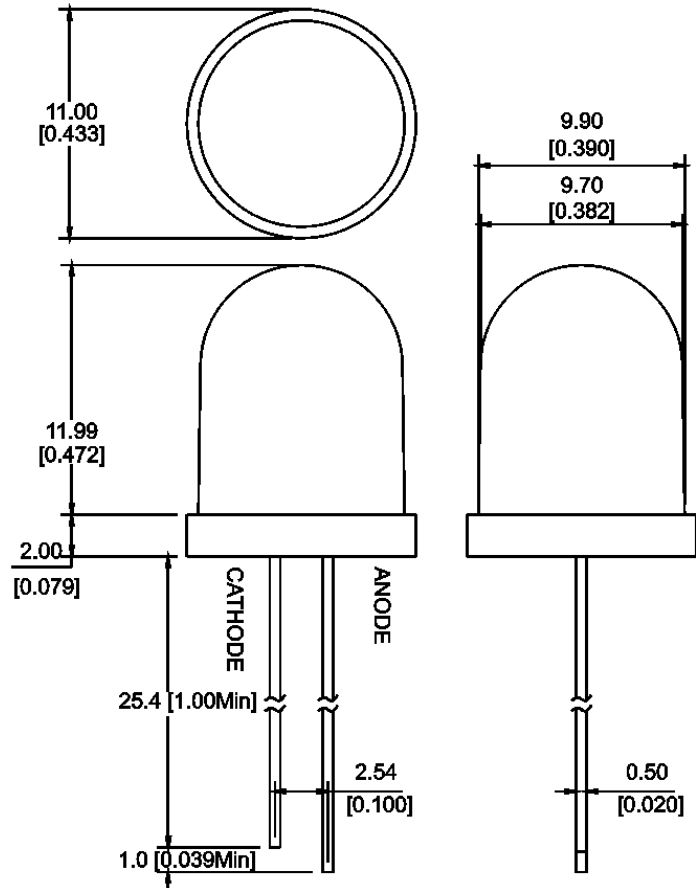


Notes:

1. All dimensions are in millimeters (inches)
2. Tolerance is  $\pm 0.25(0.01)$  unless otherwise noted.
3. Specifications are subject to change without notice.


**Round Type LED lamp, Multi-Dice**

**BL-L101XXX3**


**Typical electrical-optical characteristics curves:**

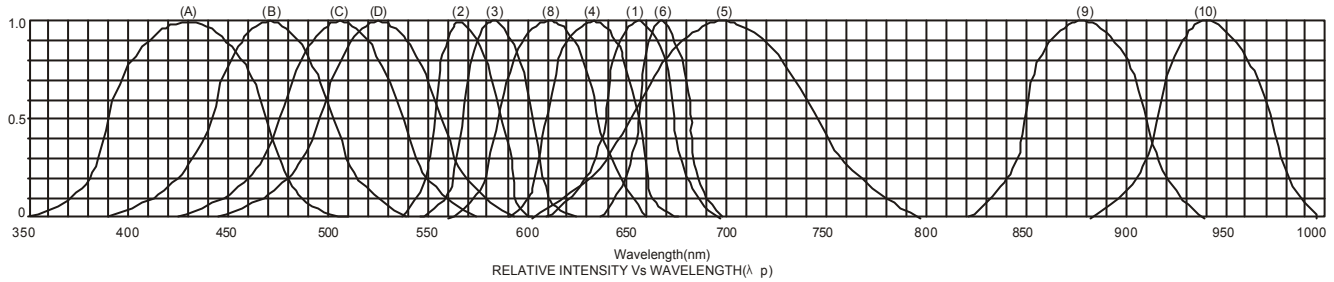


- (1) - GaAsP/GaAs 655nm/Red
- (2) - GaP 570nm/Yellow Green
- (3) - GaAsP/GaP 585nm/Yellow
- (4) - GaAsP/GaP 635nm/Orange & Hi-Eff Red
- (5) - GaP 700nm/Bright Red
- (6) - GaAlAs/GaAs 660nm/Super Red
- (8) - GaAsP/GaP 610nm/Super Red
- (9) - GaAlAs 880nm
- (10) - GaAs/GaAs & GaAlAs/GaAs 940nm
- (A) - GaN/SiC 430nm/Blue
- (B) - InGaN/SiC 470nm/Blue
- (C) - InGaN/SiC 505nm/Ultra Green
- (D) - InGaAl/SiC 525nm/Ultra Green




FORWARD VOLTAGE (Vf)  
FORWARD CURRENT VS.  
FORWARD VOLTAGE





FORWARD CURRENT (mA)  
RELATIVE LUMINOUS  
INTENSITY VS. FORWARD  
CURRENT

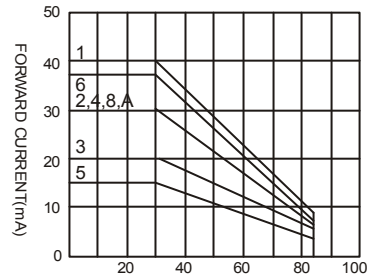

AMBIENT TEMPERATURE Ta(°C)  
FORWARD CURRENT VS. AMBIENT  
TEMPERATURE

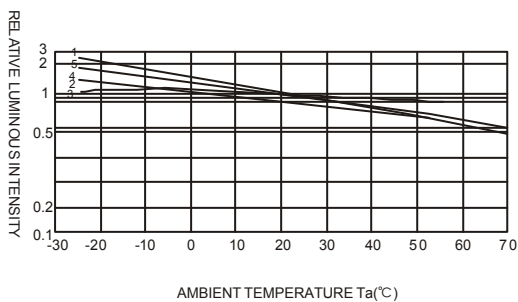

AMBIENT TEMPERATURE Ta(°C)

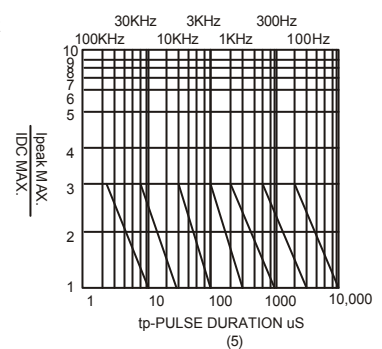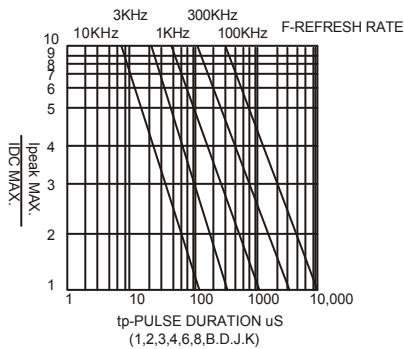

NOTE:25°C free air temperature unless otherwise specified